


Guyco Ball Valve




Advantages at a glance



- ✓ Full flow to ensure minimal head loss to the system.
- ✓ Smooth open and close action.
- ✓ Manufactured from materials that meet potable water standards.
- ✓ UV stabilised to perform in harsh sunlight conditions.
- ✓ Long BSPT threads allow better engagement with opposing connections.
- ✓ Constructed from non-corrosive materials.



Dimensions - FI x FI				
Size mm / inches	H (mm)	L (mm)	OD (mm)	Threads per inch
15mm / ½"	77.3	97.3	56	14
20mm / ¾"	77.3	97.5	56	14
25mm / 1"	87	109.4	65.8	11
32mm / 1 ¼"	99	120.9	73.6	11
40mm / 1 ½"	118.5	133	90	11
50mm / 2"	137.2	151	106.2	11

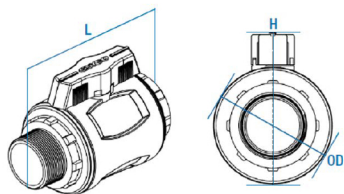

Dimensions - MI x FI				
Size mm / inches	H (mm)	L (mm)	OD (mm)	Threads per inch
20mm / ¾"	77.3	118.7	56	14
25mm / 1"	87	130.8	65.8	11
32mm / 1 ¼"	99	148.9	73.6	11
40mm / 1 ½"	118.5	155.7	90	11
50mm / 2"	137.2	175.2	106.2	11

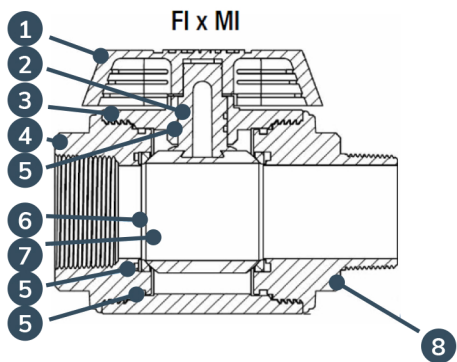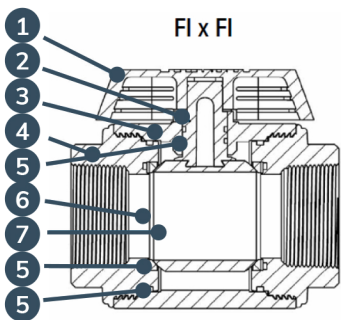

Materials	
Product	Material
1. Handle	Nylon
2. Stem	POM
3. Body	Nylon
4. End connector	Nylon
5. O-rings	NBR
6. Seat	HDPE
7. Ball	CPVC
8. Male thread end connector	Nylon